

TERMORESISTENTE KLL 125

Manguera de tejido de poliéster recubierto de PVC con espiral de acero galvanizado entre las dos capas de tejido, para aire acondicionado, aspiración de humos y aire caliente.

SUPERFÍCIES LISAS
SMOOTH SURFACE **

FLEXIBILIDAD
FLEXIBILITY *****


RESISTENCIA A LA ABRASIÓN
ABRASION RESISTANCE **

TEMPERATURA DE USO
TEMPERATURE RANGE **-5° C + 80° C**
para cortos períodos a -20° C + 110° C
for a short period up to + 110° C

RESISTENCIA QUÍMICA
CHEMICAL RESISTANCE **tabla PVC**

RESISTENCIA AL APLASTAMIENTO
CRUSHING RESISTANCE ****

AUTOEXTINGUIBLE
FLAME RETARDANT
DM 26.06.1984 con metodo de prueba
UNI 8457-8757/A1-9174-9174/A1.DM
26. 06.1984 with test methods
UNI 8457 - 8757/A1 - 9174 - 9174/A1

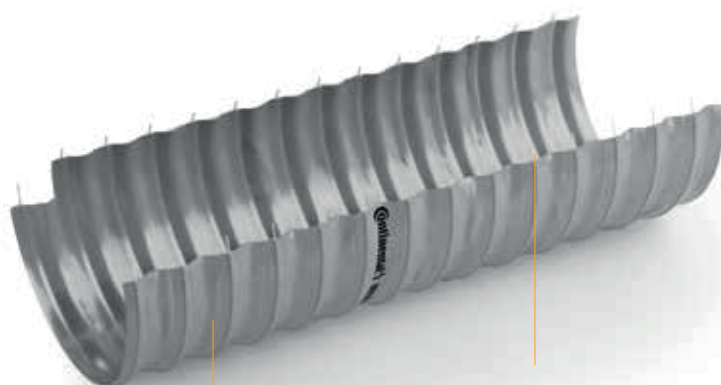

Tejido de Poliéster
recubierto de PVC

PVC coated
Polyester textile

Espiral de acero galvanizado
Galvanised steel spiral

913068



Hose made of PVC coated polyester textile with galvanised steel spiral between two layers of tissue, for air-conditioning, suction of fumes and warm air.

Ø INTERIOR Ø I.D.	Ø INTERIOR Ø I.D.	ESPEJOR PARED WALL THICKNESS	PESO WEIGHT	RADIO CURVATURA BENDING RADIUS	PASO ESPIRAL SPIRAL PITCH	Ø ESPIRAL Ø SPIRAL	VACÍO VACUUM	LONGITUD ROLLO COIL LENGTH
pulgadas	mm	mm	g/m	mm	mm	mm	m H ₂ O	mt
2	40	0,22	85	20	20	0,8	1	12
2 1/2	51	0,22	105	25	20	0,8	0,95	12
	63	0,22	130	31	20	0,8	0,90	12
	70	0,22	145	35	20	0,8	0,85	12
3	76	0,22	155	36	20	0,8	0,80	12
	82	0,22	170	41	20	0,8	0,75	12
3 1/2	89	0,22	180	44	20	0,8	0,70	12
4	102	0,22	215	51	25	1,0	0,65	12
	114	0,22	240	57	25	1,0	0,55	12
	121	0,22	255	60	25	1,0	0,50	12
5	127	0,22	265	63	25	1,0	0,45	12
	133	0,22	280	66	25	1,0	0,40	12
	140	0,22	295	70	25	1,0	0,38	12
6	152	0,22	380	76	32	1,4	0,35	12
	165	0,22	420	82	32	1,4	0,30	12
	178	0,22	450	89	32	1,4	0,25	12
8	203	0,22	510	101	32	1,4	0,20	12
9	228	0,22	570	114	32	1,4	0,15	12
10	254	0,22	640	127	40	1,6	0,12	12
	279	0,22	700	139	40	1,6	0,10	12
12	304	0,22	770	152	40	1,6	0,05	12
	330	0,22	830	165	40	1,6	0,03	12
14	355	0,22	890	177	40	1,6	0,02	12
16	406	0,22	1030	203	40	1,6	0,01	12
18	457	0,22	1300	228	40	1,8	0,0005	12
20	508	0,22	1450	254	40	1,8	0,0004	12
22	558	0,22	1580	279	40	1,8	0,0003	12

