


TERMORESISTENTE PU 200° C

Manguera de tejido de poliéster recubierto de PU con espiral de acero galvanizado entre las dos capas de tejido, para aspiración y transporte de aire caliente.

	SUPERFÍCIES LISAS SMOOTH SURFACE	***
	FLEXIBILIDAD FLEXIBILITY	*****
	RESISTENCIA A LA ABRASIÓN ABRASION RESISTANCE	*****
	TEMPERATURA DE USO TEMPERATURE RANGE	-40° C + 200°C
	RESISTENCIA QUÍMICA CHEMICAL RESISTANCE	tabla PU
	RESISTENCIA AL APLASTAMIENTO CRUSHING RESISTANCE	***
	AUTOEXTINGUIBLE FLAME RETARDANT	Reacción al fuego M1 artículo 5 ordenanza del 21.11.2002 (normativa Francia). Fire class M1 ACCORDING to article 5 ordinance 21.11.2002 (French rule).
	RESISTENCIA A LA PERFORACIÓN PERFORATION RESISTANCE	*****
	RESISTENCIA AL DESGARRO TEAR RESISTANCE	*****

Tejido de poliéster recubierto de PU
PU coated polyester textile

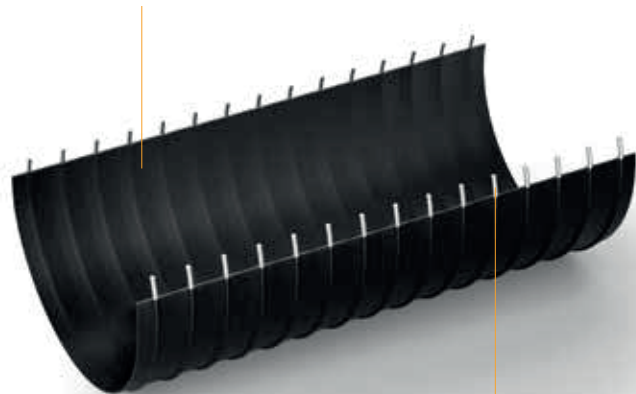

Espiral de acero galvanizado
Galvanised steel spiral

912955



Hose made of PU coated polyester textile with galvanised steel spiral between two layers of tissue, for suction and transport of warm air.

Ø INTERIOR Ø I.D.	Ø INTERIOR Ø I.D.	ESPESOR PARED WALL THICKNESS	PESO WEIGHT	RADIO CURVATURA BENDING RADIUS	PASO ESPIRAL SPIRAL PITCH	Ø ESPIRAL Ø SPIRAL	VACÍO VACUUM	LONGITUD ROLLO COIL LENGTH
pulgadas	mm	mm	g/m	mm	mm	mm	m H ₂ O	mt
2	51	0,35	225	50	14	1,2	0,95	12
2 1/2	63	0,35	275	60	14	1,2	0,90	12
	70	0,35	300	70	14	1,2	0,85	12
3	76	0,35	320	75	14	1,2	0,80	12
	83	0,35	360	80	14	1,2	0,75	12
3 1/2	89	0,35	385	90	14	1,2	0,70	12
4	102	0,35	480	100	16	1,4	0,65	12
	114	0,35	540	110	16	1,4	0,55	12
	121	0,35	580	120	16	1,4	0,50	12
5	127	0,35	600	125	16	1,4	0,45	12
	140	0,35	660	140	16	1,4	0,38	12
6	152	0,35	780	150	18	1,6	0,35	12
	178	0,35	920	180	18	1,6	0,25	12
8	203	0,35	1050	200	18	1,6	0,20	12
9	230	0,35	1350	230	18	1,8	0,15	12
10	254	0,35	1500	250	18	1,8	0,12	12
12	305	0,35	1800	300	18	1,8	0,10	6

