


Ficha Técnica *Technical Sheet* *Fiche technique*

Manguera en continuo para impulsión en múltiples aplicaciones de mantenimiento industrial y agrícola con agua caliente, agua acidulada, ácidos de baja concentración, urea (AdBlue), soluciones salinas, alcoholes y gases. Apta también para soluciones herbicidas, fungicidas e insecticidas en los procesos de fumigación profesional.

Tuyau extrudé pour refoulement dans multiples applications dans la maintenance industrielle avec eau chaude, acides de basse concentration, urea (AdBlue), solutions salines, alcools et gaz. Indiqué aussi pour les solutions herbicides, fongicides et insecticides dans les processus de fumigation professionnelle.

Long length hose for delivery in multiple applications of industrial and agricultural maintenance with hot water, acidulated water, acids of low concentration, urea (AdBlue), saline solutions, alcohols and gases. Also suitable for herbicide, fungicide and insecticide solutions in professional fumigation processes.

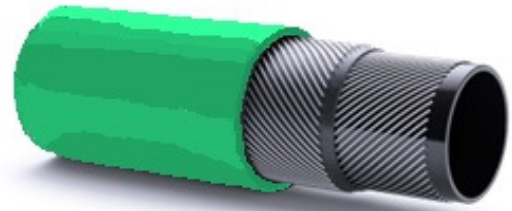

Características técnicas *Technical Characteristics* *Caractéristiques techniques*

Interior	Caucho EPDM conductivo negro.	Intérieur	Caoutchouc EPDM noir conducteur,	Tube	Black EPDM conductive rubber.
Refuerzo	Textil de alta tenacidad.	Renfort	Textile de haute ténacité.	Reinforcement	High tenacity textile reinforcement.
Exterior	Caucho EPDM verde, a la abrasión y a los agentes atmosféricos.	Extérieur	Caoutchouc EPDM vert, résistant à l'abrasion, aux intempéries et à l'ozone.	Cover	Green EPDM rubber, resistant abrasion, ozone and weather conditions.
Temperatura	-40°C +80°C productos químicos diluidos en agua (lixiviados) +120°C agua caliente.	Température	-40°C +80°C produits chimiques dilués dans l'eau (lixiviats) +120°C eau chaude	Temperature	-40°C +80°C chemicals diluted in water (leachate) +120°C hot water

Marcado / Marquage/ Marking THOR TORCHEM EPDM 20 BAR ANTISTATIC R<1 MΩ/M - date (blanco / blanc / white)

Medidas *Sizes* *Mesures*

Ref.	I.D. mm	O.D. mm	Appr. Weight kg/m	Working Pressure Bar	Burst pressure Bar	Vacuum bar	Bending Radius mm	Stock
TORCHEM.06	6	14	0.16	20	60			*
TORCHEM.08	8	16	0.20	20	60			*
TORCHEM.10	10	17	0.20	20	60			*
TORCHEM.13	13	21	0.28	20	60			*
TORCHEM.16	16	26	0.43	20	60			*
TORCHEM.19	19	29	0.49	20	60			*
TORCHEM.25	25	36	0.69	20	60			*